


**TECHNICAL  
DATA**

**MULTITUBULAR HEAT EXCHANGER  
Oil-Water-Fuel / Water  
I052**

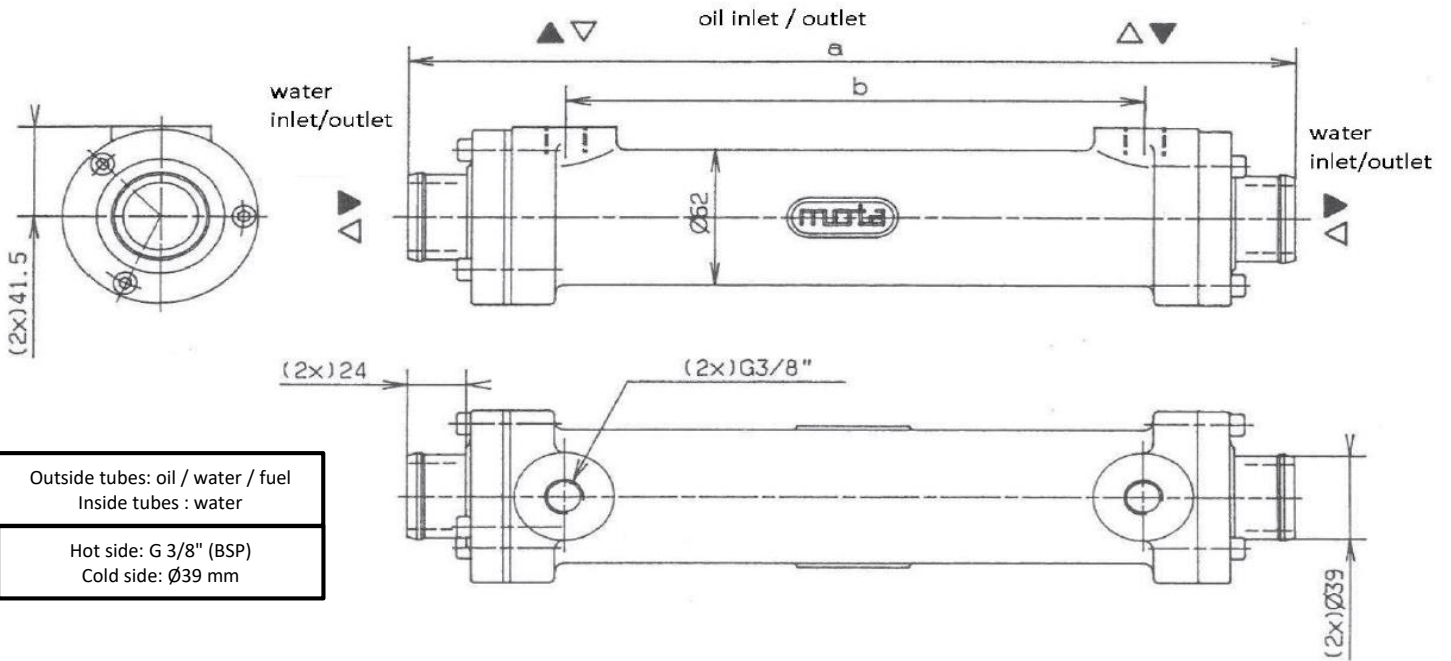


Outside tubes: oil / water / fuel Inside tubes : water
Hot side: G 3/8" (BSP) Cold side: Ø39 mm

<b>Data</b>	Cooling of oil / water / fuel by untreated water or sea water															
<b>Dimensions [mm]</b>	<b>Core length [mm]</b>															
		<b>221</b>	<b>293</b>													
	a	289,5	361,5													
	b	164,5	236,5													
<b>Area [m<sup>2</sup>]</b>	A	0,09	0,12													
<b>Volume [L]</b>	Outside tubes	0,29	0,38													
	Inside tubes	0,17	0,21													
<b>Weight [kg]</b>	Total	2,50	2,86													
<b>Working characteristics</b>	Maximum working pressure [bar]		Outlet tubes	25	Maximum water flow rate Qw = 115 L/min											
			Inlet tubes	10												
	Maximum working temperature [°C]		Outlet tubes	120												
			Inlet tubes	90												
<b>Designation</b>	Tube	Tube plate	Baffle	Shell	Water connection	O-rings										
<b>Materials</b>	Copper-Nickel	Brass	Brass	Aluminium	Bronze	Viton										
<b>Model</b>	<table border="1" style="margin: auto;"> <tr> <td style="text-align: center;">1</td> <td style="text-align: center;">0</td> <td style="text-align: center;">5</td> <td style="text-align: center;">2</td> <td style="text-align: center;">-</td> <td style="text-align: center;">2</td> <td style="text-align: center;">2</td> <td style="text-align: center;">1</td> <td style="text-align: center;">-</td> <td style="text-align: center;">1</td> </tr> </table> <p style="text-align: center;">             Type                      Core diameter                      Geometry                      Core length                      Number of passes on cold side         </p>						1	0	5	2	-	2	2	1	-	1
1	0	5	2	-	2	2	1	-	1							

**TECHNICAL  
DATA**

**MULTITUBULAR HEAT EXCHANGER  
Oil-Water-Fuel / Water  
I083**

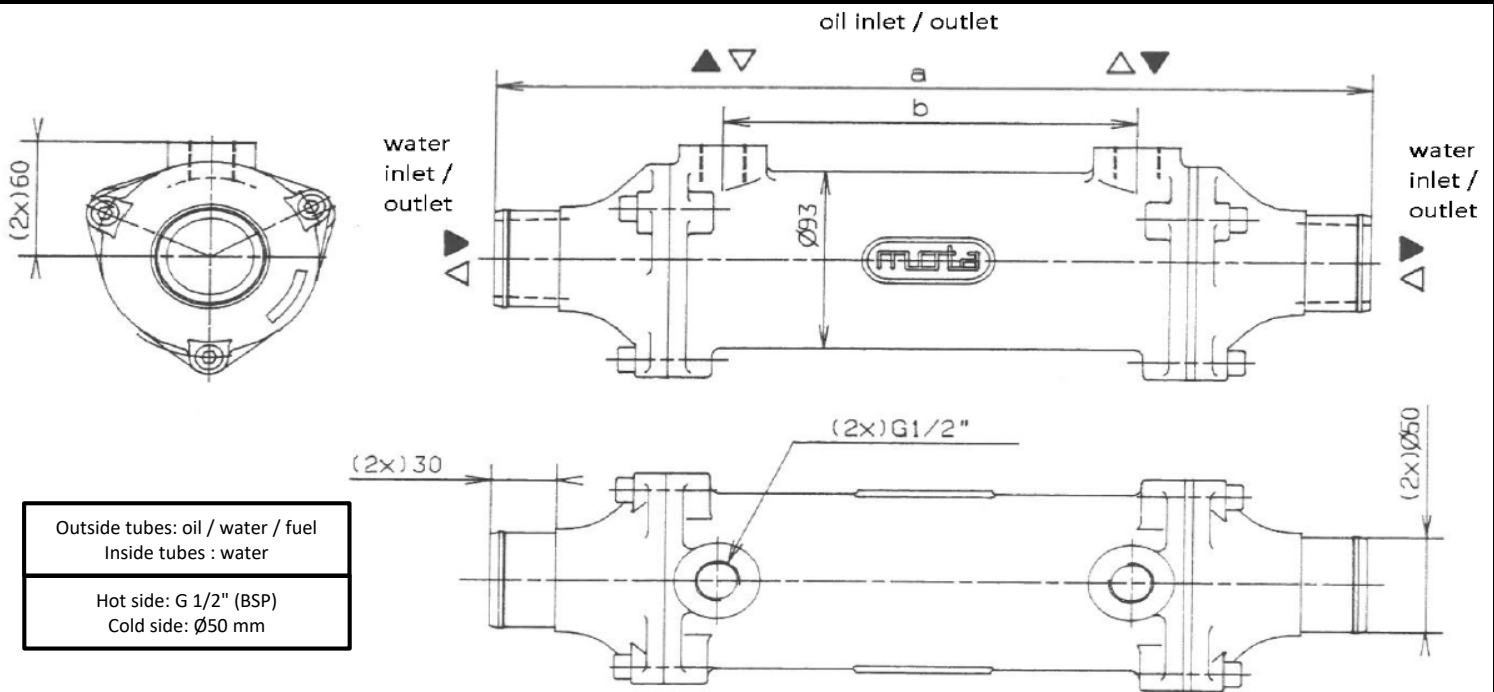

<b>Data</b>	Cooling of oil / water / fuel by untreated water or sea water															
<b>Dimensions [mm]</b>	<b>Core length [mm]</b>															
		<b>255</b>	<b>457</b>													
	a	402	604													
	b	190	392													
<b>Area [m<sup>2</sup>]</b>	A	0,43	0,78													
<b>Volume [L]</b>	Outside tubes	0,81	1,50													
	Inside tubes	0,78	1,21													
<b>Weight [kg]</b>	Total	6,20	8,53													
<b>Working characteristics</b>	Maximum working pressure [bar]		Outlet tubes	25	Maximum water flow rate Q <sub>w</sub> = 320 L/min											
			Inlet tubes	10												
	Maximum working temperature [°C]		Outlet tubes	120												
			Inlet tubes	90												
<b>Designation</b>	Tube	Tube plate	Baffle	Shell	Water connection	O-rings										
<b>Materials</b>	Copper-Nickel	Brass	Brass	Aluminium	Bronze	Viton										
<b>Model</b>	<table border="1" style="margin: auto;"> <tr> <td style="padding: 5px;">I</td> <td style="padding: 5px;">0</td> <td style="padding: 5px;">8</td> <td style="padding: 5px;">3</td> <td style="padding: 5px;">-</td> <td style="padding: 5px;">2</td> <td style="padding: 5px;">5</td> <td style="padding: 5px;">5</td> <td style="padding: 5px;">-</td> <td style="padding: 5px;">1</td> </tr> </table> <p style="text-align: center;">                     Type      Core diameter      Geometry      Core length      Number of passes on cold side                 </p>						I	0	8	3	-	2	5	5	-	1
I	0	8	3	-	2	5	5	-	1							